


# DATA SHEET DRUID NEMLINK CARD (EE-LCD2X/NLE)

The Nemlink cards provide a convenient ethernet interface for the Druid two-zone energizers and the Druid FG controller to be distributed over standard TCP/IP ethernet networks.

Ethernet connectivity allows the RS-485 LAN to operate over an IP network architecture including 802.3i (10baseT) and 802.3U (100baseT) switching and routing equipment.

Wireless communications can also be achieved using a wireless router and ethernet / 802.11 point-to-point RF solutions.

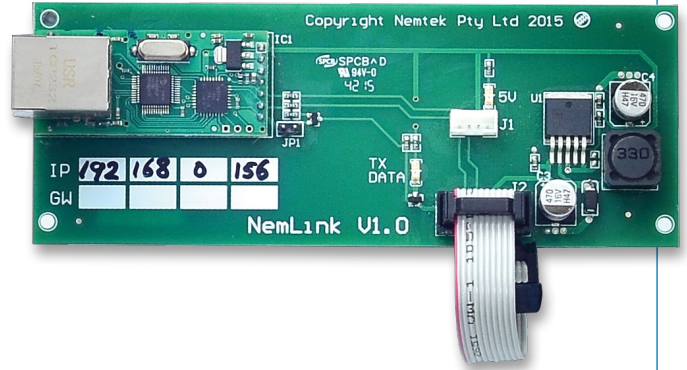

## FEATURES

- Compatible with the Druid two-zone energizers and Druid FG7 controller
- Fits inside the Druid two-zone energizer enclosure
- Provides electrical isolation between devices on the network
- User-configurable IP settings and baud rate (the D2x network uses a 19 200 baud rate)
- Enables the use of existing IP Network infrastructure, saving wiring time and costs

## SPECIFICATIONS

Size	L140mm x W55mm x H20mm
Weight	45g
Operating environment	-20°C – 55°C @ 10% – 90% RH (non-condensing)
Power supply	10V – 15V DC
Current consumption	80mA
Connector	RJ45

 Nemlink card  Network switch

